




# SR

## SERIES

DIN 止动挡圈  
(恒截面挡圈)  
CONSTANT SECTION SNAP RING

轴用  
External

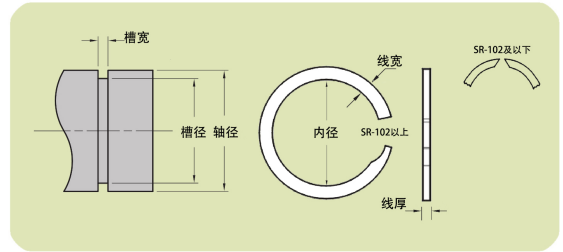

型号	轴径	环 (MM)						槽 (MM)				强度 (KN) <sup>3</sup>
		内径		线宽		线厚		槽径		槽厚		
SR-013	13	12.27		1.40		0.94		12.4		1.10		10.6
SR-014	14	13.31		1.40		0.94		13.4		1.10		11.4
SR-015	15	14.15		1.40		0.94		14.3		1.10		12.2
SR-016	16	14.98		1.65		0.94		15.2	+0/-0.11	1.10		13.0
SR-017	17	16.06		1.65		0.94		16.2		1.10		13.8
SR-018	18	16.82		1.90		1.15		17.0		1.30		18.0
SR-019	19	17.81		1.90		1.15		18.0		1.30		18.9
SR-020	20	18.80	+0/-0.33	1.90		1.15		19.0		1.30		19.9
SR-021	21	19.79		1.90		1.15		20.0	+0/-0.13	1.30		20.9
SR-022	22	20.83		1.90		1.15		21.0		1.30		21.9
SR-023	23	21.77		1.90		1.15		22.0		1.30		22.9
SR-024	24	22.50		2.15		1.15		22.9		1.30		24
SR-025	25	23.70		2.15		1.15		23.9		1.30		25
SR-026	26	24.64		2.15	±0.10	1.15	±0.05	24.9		1.30		26
SR-027	27	25.50		2.15		1.15		25.9	+0/-0.21	1.30		27
SR-028	28	26.32		3.25		1.44		26.6		1.60		33
SR-029	29	27.15		3.25		1.44		27.6		1.60		34
SR-030	30	28.35		3.25		1.44		28.6		1.60		36
SR-032	32	29.87		3.25		1.44		30.3		1.60		38
SR-033	33	31.07	+0/-0.38	3.25		1.44		31.3		1.60		39
SR-034	34	31.96		3.25		1.44		32.3		1.60		40
SR-035	35	32.57		3.25		1.44		33.0		1.60	+0.14/-0	41
SR-036	36	33.64		4.01		1.69		34.0		1.85		50
SR-038	38	35.62		4.01		1.69		36.0		1.85		53
SR-040	40	37.02		4.01		1.69		37.5	+0/-0.25	1.85		56
SR-042	42	39.08		4.01		1.69		39.5		1.85		58
SR-045	45	42.05	+0/-0.51	4.01		1.69		42.5		1.85		63
SR-046	46	43.10		4.01		1.69		43.5		1.85		64
SR-047	47	44.03		4.01		1.69		44.5		1.85		65
SR-048	48	44.89		4.01		1.69		45.5		1.85		67
SR-050	50	46.50		5.08		1.93		47.0		2.15		75
SR-052	52	48.48		5.08		1.93		49.0		2.15		78
SR-054	54	50.46		5.08		1.93		51.0		2.15		81
SR-055	55	51.45		5.08		1.93		52.0		2.15		83
SR-056	56	52.44		5.08		1.93		53.0		2.15		84
SR-058	58	54.42	+0/-0.63	5.08		1.93		55.0		2.15		87
SR-060	60	56.55		5.08		1.93	±0.08	57.0		2.15		90
SR-062	62	58.32		5.08	±0.13	1.93		59.0		2.15		93
SR-063	63	59.37		5.08		1.93		60.0	+0/-0.30	2.15		95
SR-065	65	61.35		5.08		2.41		62.0		2.65		117
SR-067	67	63.35		5.08		2.41		64.0		2.65		120
SR-068	68	64.45		5.08		2.41		65.0		2.65		122
SR-070	70	66.22		5.08		2.41		67.0		2.65		126
SR-072	72	68.28	+0/-0.76	5.08		2.41		69.0		2.65		129
SR-075	75	71.25		5.08		2.41		72.0		2.65		135




# SR

## SERIES

DIN 止动挡圈  
(恒截面挡圈)  
CONSTANT SECTION SNAP RING

轴用  
External

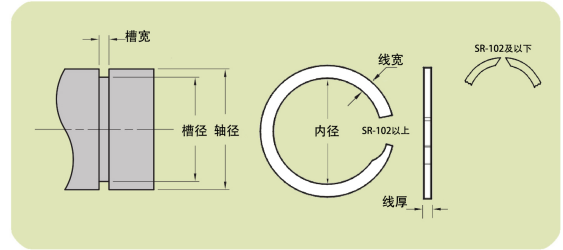

型号	轴径	环 (MM)				槽 (MM)				强度 (KN) <sup>3</sup>		
		内径		线宽	线厚	槽径		槽厚				
SR-077	77	73.23		5.08		2.41		74.0		2.65		138
SR-078	78	74.06		5.08		2.41		75.0	+0/-0.30	2.65	+0.14/-0	140
SR-080	80	75.70	+0/-0.76	6.02		2.41		76.5		2.65		144
SR-082	82	77.68		6.02		2.91		78.5		2.65		147
SR-085	85	80.65		6.30		2.91	±0.08	81.5		3.15		176
SR-088	88	83.60		6.30		2.91		84.5		3.15		182
SR-090	90	85.80		6.30		2.91		86.5	+0/-0.35	3.15		186
SR-095	95	90.63	+0/-0.89	6.30		2.91		91.5		3.15		196
SR-098	98	93.70		6.30		2.91		94.5		3.15		203
SR-100	100	95.50		6.30		2.91		96.5		3.15		207
SR-102	102	97.23		6.30	±0.13	3.89		98.5		3.15		211
SR-105	105	99.83		6.73		3.89		101.0		4.15		277
SR-108	108	102.87		6.73		3.89		104.0	+0/-0.54	4.15		285
SR-110	110	104.90		6.73		3.89		106.0		4.15		290
SR-115	115	109.85	+0/-1.30	6.73		3.89		111.0		4.15		303
SR-120	120	115.06		6.73		3.89		116.0		4.15		316
SR-125	125	119.75		6.73		3.89		121.0		4.15		329
SR-130	130	124.70		6.73		3.89		126.0		4.15		343
SR-135	135	129.65		6.73		3.89		131.0		4.15		356
SR-140	140	134.42		6.73		3.89		136.0		4.15		369
SR-145	145	139.55		6.73		3.89	±0.10	141.0		4.15	+0.18/-0	382
SR-150	150	143.50		8.03		3.89		145.0		4.15		396
SR-155	155	148.45		8.03		3.89		150.0	+0/-0.63	4.15		409
SR-160	160	153.40		8.03		3.89		155.0		4.15		422
SR-165	165	158.40	+0/-1.52	8.03		3.89		160.0		4.15		435
SR-170	170	163.30		8.03	±0.15	3.89		165.0		4.15		449
SR-175	175	168.25		8.03		3.89		170.0		4.15		462
SR-180	180	173.20		8.03		3.89		175.0		4.15		475
SR-185	185	177.62		8.03		3.89		180.0		4.15		488
SR-190	190	183.35		8.03		3.89		185.0		4.15		501
SR-195	195	188.05		8.03		3.89		190.0		4.15		515
SR-200	200	193.00	+0/-1.78	8.03		3.89		195.0		4.15		528
SR-205	205	196.95		11.05		4.87		199.0		5.15		641
SR-210	210	201.67		11.18		4.87		204.0	+0/-0.72	5.15		657
SR-220	220	211.80		11.18		4.87		214.0		5.15		688
SR-230	230	221.70		11.18		4.87		224.0		5.15		720
SR-240	240	231.89		11.18		4.87		234.0		5.15		751
SR-250	250	241.50		11.18	±0.18	4.87	±0.13	244.0		5.15		782
SR-260	260	249.59		12.70		4.87		252.0		5.15		814
SR-270	270	259.30	+0/-2.30	12.70		4.87		262.0		5.15		845
SR-280	280	268.83		12.70		4.87		272.0	+0/-0.81	5.15		876
SR-290	290	279.10		12.70		4.87		282.0		5.15		907
SR-300	300	289.00		12.70		4.87		292.0		5.15		939